



# WHITE CEMENT BASED SURFACE FINISHING PLASTER

## HAWKS WALL FINISH

HAWKSWALL FINISH is premixed white powder for smooth finishing. Crack free & water-resistant coat to be applied over cement plastered surface. HAWKSWALL FINISH required only addition of clean water for mixing. It is designed to bond any cement-based surface.

HAWKSWALL FINISH is water resistant hence HAWKS WALL FINISHED plaster withstands dampness, moisture and is suitable for using Indoor and Outdoor.

### PRODUCT BENEFITS

- Machine Blended pre-mixed powder ensures consistent quality for a long-lasting durability. Paints do not peel.
- Does not require primer for new cement plastered surface. Excellent workability for speedy application.
- White color offers an option to reduce painting costs.
- surfaces highly durable and weather & water resistant
- Weather and water-resistant HAWKS WALL FINISH protects the surface and impervious to termites.



Environment friendly  
Lead free



### MIXING PROCEDURE

- Add Hawks Wall Finish to a bucket containing clean water, mixing uniformly to achieve the required thick creamy consistency.
- The mixing ratio is 10 kg Hawks Wall Finish and approximately 3.5 to 4 lit. of water. The pot life is about 1 ½ hours after mixing.
- Do not add water to mixture that has begun to set.

### SURFACE PREPARATION

All surfaces should be structurally sound, clean, free from dust & loose particles. Imperfections of surface such as cracks, holes, voids should be repaired before the application of Hawks Wall Finish.

*Note: The information given in this literature is in good faith, but without warranty as conditions of storage and use vary and are beyond our control.*

## HAWKS PAINTS & COATINGS PVT LTD

BUILDING NO-6, HDIL COMPLEX, MEGHDOOT INDUSTRIAL ESTATE, VIRAR(E)-401303

+91-8805399450/9552730728/9004394151 info@hawkspaints.com




www.hawkspaints.com



## APPLICATION PROCEDURE

- Surface should be evenly wetted and should be moist at the time of application to avoid suction.
- Trowel/Painter's putty knife should be used to apply Hawks Wall Finish. Hawks Wall Finish should be evenly spread on the surface with sufficient pressure ensuring a tight contact.
- The thickness of initial coat should be approximately 1-1.5 mm. Allow first coat to dry 3-5 hrs. and apply final coat.
- When final coat starts to dry, trowel it well while compacting the material
- With sprinkled water. Water cure after 24 hrs, for 2-3 days.
- When the cured surface is dry, smoothen the surface by rubbing gently with a '0' number sand or emery paper. Clean the surface with a piece of cloth to remove any dust etc. and Hawks Wall Finish surface is ready for painting.

## PACKAGING

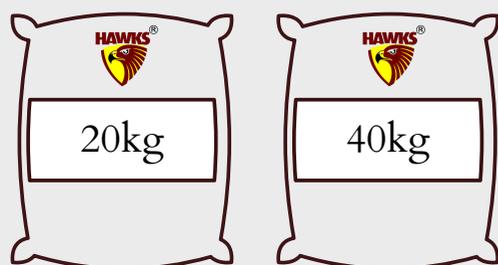

## SAFETY & ENVIRONMENT

- Hawks Wall Finish is non-toxic and non-flammable, making it environment friendly.
- Splashes of Hawks Wall Finish coming in contact with skin should be washed with water for easy removal. If it comes in contact with eyes wash with plenty of water. If irritation persists, obtain medical help.

*Note: The information given in this literature is in good faith, but without warranty as conditions of storage and use vary and are beyond our control.*

# HAWKS PAINTS & COATINGS PVT LTD

BUILDING NO-6, HDIL COMPLEX, MEGHDOOT INDUSTRIAL ESTATE, VIRAR(E)-401303

+91-8805399450/9552730728/9004394151 info@hawkspaints.com